




Catalog sheet

OZ 01.V - Floor drain with grid

OZ 01.V is a fully stainless steel industrial floor drain with a trap, intended for kitchens, halls, and other indoor areas where pallet trucks and forklifts are not in operation. The drain is covered with a stainless steel grid with openings measuring 25 x 25 mm. Due to the size of the openings in the cover grate, it is not suitable for use in showers or other areas where people move around barefoot.

The floor drain is available in three standard versions according to the diameter of the waste pipe: **d = 50 mm, 75 mm, and 110 mm**. The waste flows downward. A grease trap basket is also available for each floor drain for an additional charge (must be specified in the order).

The floor drain is made of stainless steel of grade ČSN 17 240 (AISI 304). Cleaning products containing chlorine must not be used. For environments with a chlorine content, we recommend consulting on a custom version made of a different material (e.g., AISI 316). For the maintenance of stainless steel products, we recommend using Würth products.

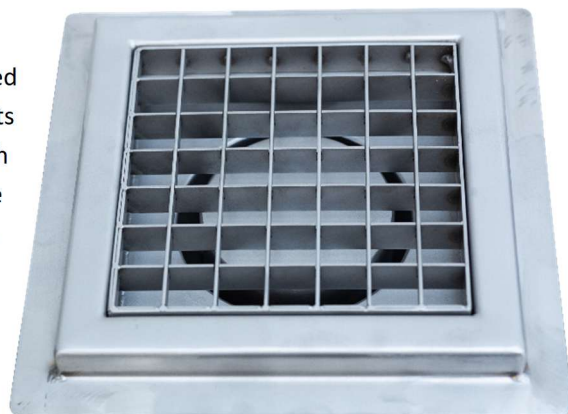

Complete delivery

- Stainless steel floor drain 1 pc
- Cover grid 1 pc
- Odor trap – cover 1 pc
- * Grease trap basket according to the type of floor drain (on order)
 - Grease trap basket for OZ 01.V.50 order.ref. 1231701101
 - Grease trap basket for OZ 01.V.75 order.ref. 1231701111
 - Grease trap basket for OZ 01.V.110 order.ref. 1231701121

Available variants

- | | |
|---------------|------------------------------------|
| • OZ 01.V.50 | Floor drain with grid 243 x 243 mm |
| • OZ 01.V.75 | Floor drain with grid 270 x 270 mm |
| • OZ 01.V.110 | Floor drain with grid 343 x 343 mm |



Technical details

- | | |
|--------------------------------|---|
| • Diameter of the waste outlet | according to the type of floor drain (d 50 mm, 75 mm, 110 mm) |
| • Max. flow of the odor trap | according to the type of floor drain (35 L/min, 50 L/min, 80 L/min) |
| • Load | The K3 class inlet is not designed for perpendicular crossing with a pallet truck |

Construction readiness requirements

- A suitable opening in the floor for installing a floor drain.
- Set-up waste pipe.



Diagram

D 50 mm	D 75 mm	D 110 mm

1. Stainless steel floor drain
2. Odor trap – cover
3. Cover grid
4. ***Optionally available** grease trap basket upon request according to the type of floor drain

